



Perfect surfaces – and what you see here is only the outside!

» Variable capacity tank B0

The variable capacity tank B0 is often described as 'starter kit'. It is, however, also utilised by advanced users for small quantities. Its outstanding price-performance ratio and handy size have made it so popular that the 'B0' is now being used all over the world.

Thanks to its floating lid (accessory) the tank's volume always adapts itself to the actual content and locks the tank up properly. The tanks have a strengthening rim. The flat base ensures high stability, characteristic of all Speidel tanks.



APPLICATION RANGE (PRESSURELESS)

- › Storage
- › Maturation
- › Fermentation

- Ideal for
- › Wine
 - › Must


STANDARD EQUIPMENT FOR VARIABLE CAPACITY TANK BO

- > AISI 304 stainless steel, outside and inside surface 3R (2R)
- > Open tank top with strengthening rim
- > Flat tank bottom
- > External litre scale

- WIDTH OF RIM**
- > Up to 290 litres capacity = approx. 17 mm
 - > From 650 litres capacity = approx. 42 mm

- RACKING OUTLET**
- > Up to tanks of 550 mm \varnothing internal thread G 3/4" (BSP) with plastic blank bung
 - > From tanks of 630 mm \varnothing external thread G 1" (BSP) with plastic blank bung

DIMENSIONS OF VARIABLE CAPACITY TANK BO

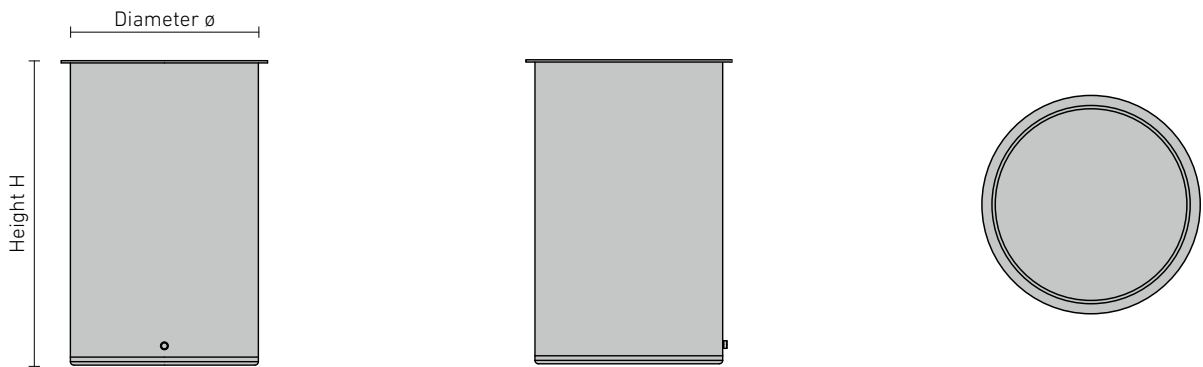

Capacity litres	\varnothing mm	H mm	Order No. loose
110	440	765	BO-044 -0110
220	550	999	BO-055 -0220
290	630	999	BO-063 -0290
650	820	1,328	BO-082 -0650
1,100	1,000	1,493	BO-100 -1100
1,600	1,200	1,493	BO-120 -1600

