

Simply breathtaking



» Variable capacity tank F01 / F02

Speidel's variable capacity tanks always adapt to the amount of liquid they contain. The floating lid ensures that no air comes in. This way oxidation stands no chance.

Our popular variable capacity tanks have been established and proven in many ways. Like all Speidel tanks they are top-quality. They can be used as storage tanks or fermentation tanks.



Access of air not permitted! Floating lid that serves as a seal to keep air outside.

APPLICATION RANGE (PRESSURELESS)

- › Storage
- › Maturation
- › Fermentation

- Ideal for
- › Wine
 - › Must

STANDARD EQUIPMENT FOR VARIABLE CAPACITY TANK F01 / F02

- › AISI 304 stainless steel, surface IIIId (2R), marbled outside
- › Tank open on top with strengthening rim
- › Vaulted tank bottom
- › External litre scale
- › Standing on three legs

WIDTH OF RIM

- › Up to 300 litres capacity = approx. 17 mm
- › From 530 litres capacity = approx. 42 mm

RACKING OUTLET F01

- › Up to tank-ø of 550 mm internal thread 3/4" (BSP) with plastic blank bung
- › From tank-ø of 630 mm external thread G 1" (BSP) with plastic blank bung

BOTTOM OUTLET F01

- › Up to tank-ø of 550 mm total outlet neck internal thread G 3/4" (BSP) with plastic blank bung
- › From tank-ø of 630 mm bottom outlet neck external thread G1" (BSP) with plastic blank bung


RACKING OUTLET F02

- › Plain surface with drilled hole ø 48 mm (to hold flap valve Gr. 37 or weld-on thread NW 40, NW 50 DIN 11851)
- › In case of ø 630 mm reinforcement moulded out of the tank's casing
- › In case of ø 820 mm with welded-on reinforcing plate

BOTTOM OUTLET F02

- › Total outlet neck with external thread NW 40 DIN 11851

DIMENSIONS OF VARIABLE CAPACITY TANK F01 / F02

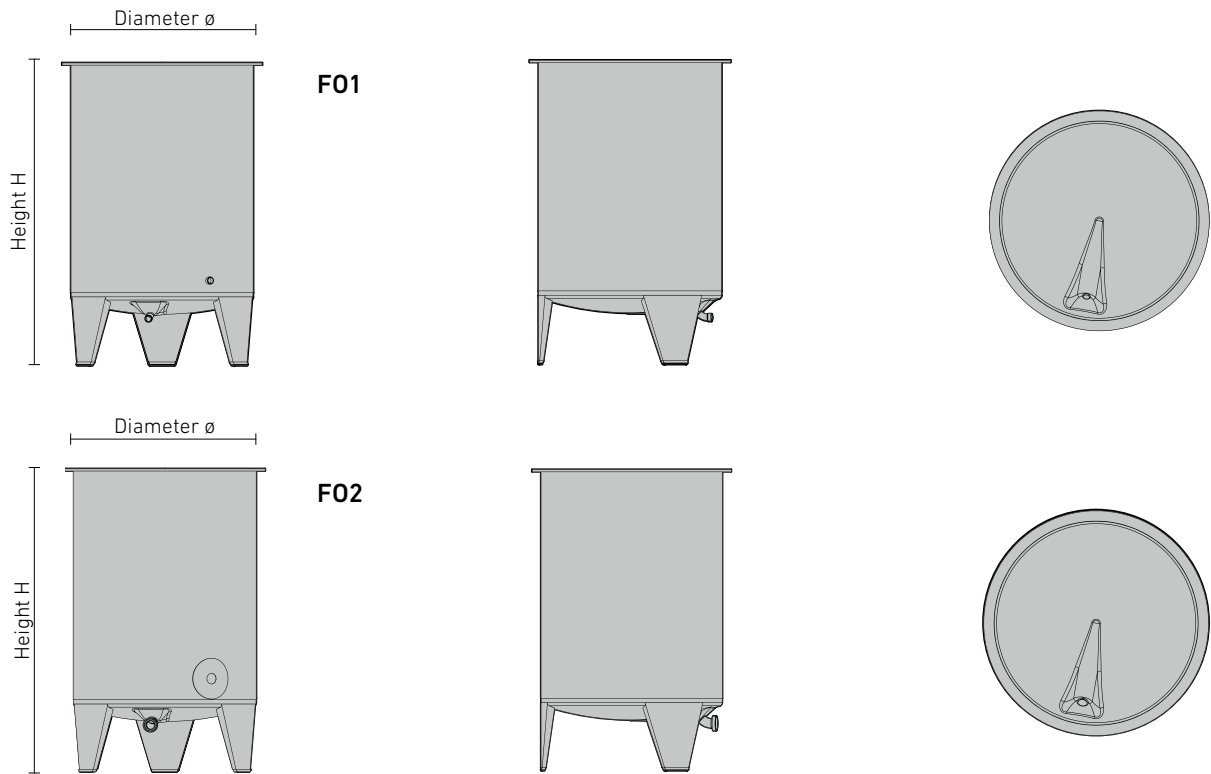

| Capacity litres | H mm | ø mm | Order No. F01 | ø mm | Order No. F02 |
|--------------------|---------|---------|------------------|---------|------------------|
| 220 | 1,382 | 550 | F01-055- 220 | - | - |
| 300 | 1,384 | 630 | F01-063- 300 | 630 | F02-063- 300 |
| 530* | 1,361 | 820 | F01-082- 530 | 820 | F02-082- 530 |
| 675* | 1,620 | 820 | F01-082- 675 | 820 | F02-082- 675 |
| 910* | 2,109 | 820 | F01-082- 910 | 820 | F02-082- 910 |

* Also deliverable with the useful PE-base for transportation and storage instead of sturdy legs (see page 186)